




MAIN FEATURES

- Standalone, server-independent operation
- Web-based monitoring and playback
- IP66 vandal-proof metal housing
- IR illumination effective up to 10 meters
- Intellio Video Codec / H.264 / MJPEG

OPTIONAL ACCESSORIES AND LENSES

Wall mount	ILA-WMC-MVD	
Power supplies	ILA-PS-12-L-EU	ILA-PS-12-H-EU

LENSES		
Focal length	Horizontal view angle range	Vertical view angle range
3.6 mm	76°	57°
6 mm	46°	34°
8 mm	34°	26°

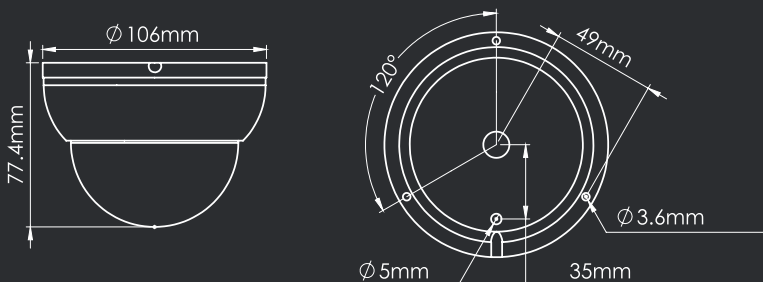

INTELLIO ORIO DOME ILD-315B-IR-MVD

CAMERA

Image sensor	Aptina 1.3MP, WDR, 1/3" CMOS Progressive Scan
Sensitivity	Day/Night/LED: 0.7lux / 0.01lux / 0lux
Shutter Time	1/6s - 1/20,000s
Day/Night mode	True
Lens options	3.6 / 6 / 8mm

IMAGE

Resolution	1280x960; 640x480
Frame Rate	13fps (IVC 1280x960), 18fps (IVC 640x480) 10fps (MJPEG 1280x960), 15fps (MJPEG 640x480) 8fps (H.264 1280x960), 15fps (H.264 640x480)
Image Settings	Brightness, Exposure Control, Gain Control, Anti Flickering (50Hz/60Hz), Saturation, Contrast, Gamma, Day/Night mode (Auto/Day/Night), Preferred Day/ Night Mode, Sharpness, Noise Filtering, Image Mirroring
Encoder Settings	Codec Type, Quality, I-frame Distance, Block Sensitivity, Resolution, Frame Limit, Reduced Frame Rate Control, Bandwidth Limit, Pre- and Post-alarm

NETWORK

Protocols	NTP, TCP/IPv4, DHCP, DNS
Security	Camera User Name and Password

GENERAL

Environmental Protection	IP66
Vandal Resistance	IK10
Operating Temperature	-30 °C - +50 °C
Installation Environment	Indoor/Outdoor
Power Supply	PoE support (IEEE 802.3af) – PoE Class 0 (max. 50m range) 22-50V DC
Power Consumption	24V DC: Max 11 W, PoE: Max 9 W
Weight	460 g
Certificates	CE: EN 55022, EN 55024, RoHS Compliant

TÖMÖRÍTÉS

Videotömörítés	Intellio Video Codec (IVC), H.264, Motion JPEG
Bitráta	32Kbps - 12Mbps
Videofolyam	Intellio Video Streaming, Dual streaming RTSP-en keresztül

IR ILLUMINATION

IR LED	13 pieces of IR LED, 850 nm
IR illumination distance	10 m
Illumination angle	70°

INTERFACE

Ethernet	10BaseT/100BaseTX, RJ-45
Reset Button	Reset To Factory Defaults (IP Address Reset)
Szerverfüggetlen rögzítés	SD kártyára, Windows megosztott mappába

CAMERA SOFTWARE

Motion Detection	64 polygon per mask, 8 masks, All masks with adjustable sensitivity and motion percent parameters, Separated motion detector for monitoring and for recording
------------------	---

INTELLIGENS VIDEÓ

Detectors	Motion Detector Tampering detectors: Covering detection, Rotation detection
Extended Intelligence	Tracker based detectors: Intelligent motion detection, Tripwire detection, Entry detection, Direction detection Object based detector: Object removal / theft detection
Object Tracker	64 polygon for masking, Object behavior settings, Day-time/Night-time sensitivity, Environmental settings



13
MP
MEGAPIXEL
RESOLUTION



CAMERA-SIDE
VIDEO
ANALYTICS



ON-BOARD
STORAGE ON
SD CARD



VANDAL-PROOF



INFRA-RED LED
LIGHTING



INTELLIO
VIDEO CODEC



POE
SUPPORT